




1X Series Option Boards

2010-1-RB, 2010-1-SB

Overview

1X fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking black lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

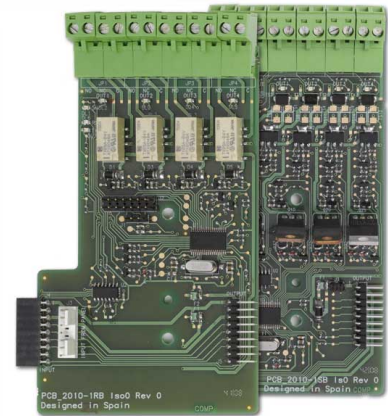

2010-1-RB Relay Output Board

The 2010-1-RB is a programmable, voltage free relay board. It provides 4 auxiliary outputs for the 1X conventional fire alarm control panel. These outputs may be allocated to activate on various alarm statuses of the panel, or to activate on the status of any, all or combinations of the individual fire detection zones in the panel. Up to 4* of these modules may be installed on the 1X panel line.

* Quantity depends on the size of the fire panel cabinet.

2010-1-SB Supervised Output Board

The 2010-1-SB is a programmable, supervised relay board. It provides 4 auxiliary outputs for the 1X conventional fire alarm control panel. These outputs may be allocated to activate on various alarm statuses of the panel, or to activate on the status of any, all or combinations of the individual fire detection zones in the panel. Up to 4* of these modules may be installed on the 1X panel line.

* Quantity depends on the size of the fire panel cabinet.

Standard Features

- 2010-1-RB
 - » 4 Potential free, COM-NO-NC, relay outputs
 - » Bus type, easy cable free panel installation
 - » Powered from panel bus
 - » "AND" and "OR" programming functionality
 - » Output delay setting per output
- 2010-1-SB
 - » 4 Reversed polarity, supervised outputs
 - » Bus type, easy cable free panel installation
 - » Powered from panel bus
 - » "AND" and "OR" programming functionality
 - » Output delay setting per output

1X Series Option Boards

2010-1-RB, 2010-1-SB

Specifications

Electrical	
Operating voltage	24 VDC
Current (quiescent)	30 mA
Current (active)	1 A
Environmental	
Operating temperature	-5°C to +40°C
Storage temperature	-5°C to +70°C
Relative humidity (noncondensing)	10 to 95%
Physical	
Number of outputs	4
Dimensions	127 × 76 mm

2010-1-RB	
Relay contact rating	2 A @ 30 VDC
Weight	46 g

2010-1-SB	
Output rating (powered from panel)	250 mA (max) per output / 300 mA shared for all outputs
Output rating (powered externally)	250 mA (max) per output
Weight	48 g

Ordering Information

Part No.	Description
2010-1-RB	Conventional Fire Panel Accessory - Relay Board - Unsupervised
2010-1-SB	Conventional Fire Panel Accessory - Relay Board - Supervised



www.gesecurity.eu

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.

IPS-1X Series Option Boards-2009-10-13 04:25:07 Released : 23-JUL-09;