



1X-F8-xx

Conventional Fire Panel with User Interface - 8 Zone

Overview

1X fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking black lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

The Panel

The 1X-F8 is a conventional fire alarm control panel. It is supplied in local language with 8 zones that support up to 32 devices per zone, as well as up to 4 supervised relay outputs dedicated to sounder control and fire routing. In addition 2 conventional relay outputs dedicated to common fire and fault conditions, as well as two user configurable inputs for monitoring and control are available.

Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 16 additional outputs.

Approvals & Compliance

The product line carries the following accreditations:

- EN54:2, EN54:4 and CE approved
- CPD certified
- NEN2535, NBNS21-100 and BS5839-1 compliant

- WEEE compliant
- RoHS compliant

Type class conditions: 3K5 of IEC 60721-3-3



Standard Features


- Modern, elegant design
- Easy removable parts for quick and clean installation
- Default regional setup modes
- Normal & head-out zone support
- Supervised alarm notification & fire protection outputs
- EN54 compliant potential free fire & fault relays
- Class change, day/night & remote reset facilities
- Auxiliary 24VDC supply output with reset support
- Default support for special functions such as:
 - EN54 compliant user access levels
 - mixed zones
 - full front panel diagnostics
 - one-man walk test
 - CleanMe™
- Auxiliary standard & supervised relay output boards

1X-F8-xx

Conventional Fire Panel with User Interface - 8 Zone

Specifications

Input Supply	110 VAC/60 Hz or 240 VAC/50 Hz
Tolerance	+10% / -15%
Current consumption (max)	3.15 A @ 110/< 1.5 A @ 240 VAC
Cable specification	3 x 1.5 mm ² (live, neutral, earth)
Batteries	2 x 12V - 7.2 or 12 Ah (SLA)
Panel Supply	4A @ 24 VDC
Quiescent current (no devices)	80 mA
Alarm current (no devices)	160 mA
Zones	8
Output voltage	22 VDC (18-24 VDC)
Load (max)	65 mA
Cable resistance (max)	40 ohm
Cable capacitance (max)	500 nF
Devices per zone (max)	32
Inputs	2
Cable resistance (max)	100 ohm
Supervised Outputs	4
Output voltage	-15 to +28 VDC
Load (max)	500 mA
Non Supervised Outputs	2
Load	2 A @ 30 VDC
Auxiliary Supply Output	
Output voltage	24 VDC (21 to 28 VDC)
Load (max)	250 mA @ 25°C / 195 mA @ 40°C
Environmental	
Storage temperature	-20 to +70°C
Operating temperature	-5 to +40°C
Relative humidity (noncondensing)	10 to 95%
IP Rating	IP30
Mechanical	
Size (h x w x d)	480 x 440 x 140 mm
Weight (without batteries)	3.9 kg
Colour	RAL7035
Cable entry (top / bottom / rear)	Ø 20 mm - 20 / 2 / 26

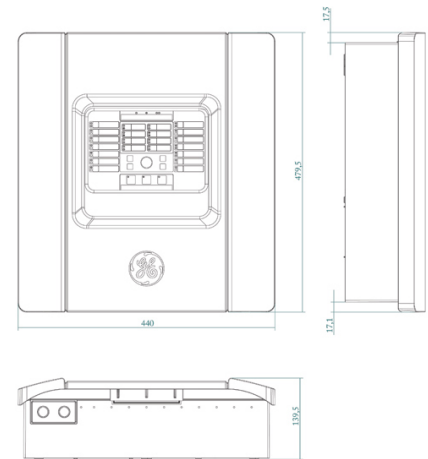

Ordering Information

Part No.	Description
1X-F8-xx	Conventional Fire Panel with User Interface - 8 Zone
1X-F8-NL-xx	Conventional Fire Panel with User Interface with Alarm Counter - 8 Zone
1X-F8-SC-xx	Conventional Fire Panel with User Interface with Scandinavian Key - 8 Zone
-xx	Replace by the applicable language code (check with your local GE Security equipment supplier)
2010-1-RB	Conventional Fire Panel Accessory - Relay Board - Unsupervised
2010-1-SB	Conventional Fire Panel Accessory - Relay Board - Supervised
BS127N	Sealed Lead-Acid Battery - 12V 7.2Ah - VdS approved
BS130N	Sealed Lead-Acid Battery - 12V 12Ah - VdS approved



www.gesecurity.eu

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.

IPS-1X-F8-xx-2009-10-13 04:24:05 Released : 25-SEP-09;