


ZP3AB-SCB-D

Remote display unit interface

Specifications

Model No	ZP3AB-SCB-D
Description	Remote display unit interface card
Compatibility	ZP3 control panels
Mounting	Plug and socket - fixes to allotted space on panel main control board
Comms protocol	RS 485
Current consumption	40 mA
Wiring	Two cores twisted screened pair Max cable length 2km for all remote units connected to a ZP3 panel Cable lengths greater than 2km via RS 485 booster or fibre optic connection
Temperature range	-10°C to +60°C
Humidity range	10% to 90% RH (non condensing)
Dimensions	PCB 120mm (H) x 55mm (W)
Weight	53g
Publication No	PS1309

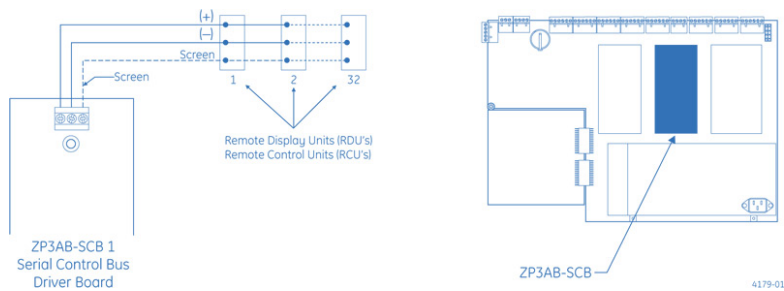

Ordering Information

Part No.	Description
ZP3AB-SCB-D	Remote display unit interface

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.

IPS-ZP3AB-SCB-D-2007-07-31 11:31:53 Released : 17.07.2007

UK Sales: 8 Newmarket Court, Chippenham Drive, Kingston, Milton Keynes, MK10 0AQ, United Kingdom, Telephone +44 (0) 1908 281981, Fax +44 (0) 1908 282554
South Africa: Zitton House, 555 Voortrekker Road, Maitland, 7405, P.O. Box 181, Maitland, 7404, South Africa, Telephone +27 (0)21 506 6000, Fax +27 (0)21 506 6050